


Prescor

For sealed central heating and chilled water (cooling) installations. The valve opens when the pressure increases excessively.

- Specially designed pop action for full discharge at opening pressure to reduce the pressure quickly.
- High quality materials and state-of-the-art design features guarantee a high degree of safety.
- CE-conformity mark (PED 2014/68/EU), for application areas according to Pressure Equipment Directive.
- The opening pressure of all valves is individually tested.
- Suitable for addition of glycol-based anti-freeze up to 50%.
- Minimum/Maximum working temperature: -10 °C / 120 °C.
- Peak load: 140 °C.

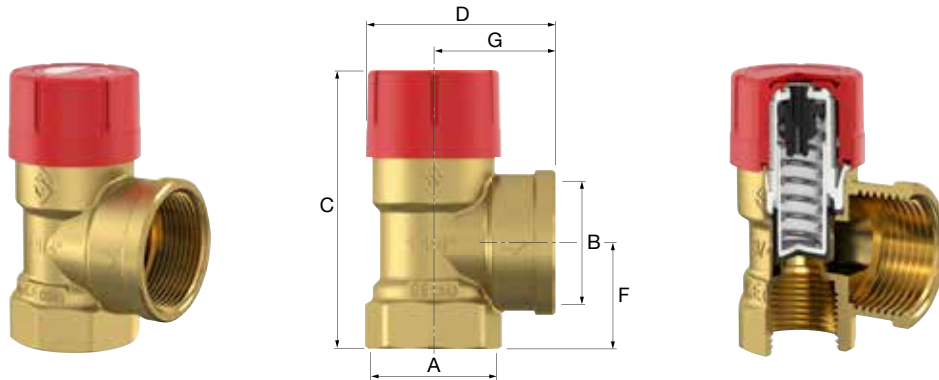

Type	Set pressure [bar]	Connection		Dimensions				Heating capacity [kW]		Order Code
		A	B	C [mm]	D [mm]	F [mm]	G [mm]			
Prescor 1/2	1.5	Rp 1/2"	Rp 1/2"	68.7	47.2	21.5	28.5	85	50	27608
Prescor 1/2	1.8	Rp 1/2"	Rp 1/2"	68.7	47.2	21.5	28.5	95	50	27602
Prescor 1/2	3.0	Rp 1/2"	Rp 1/2"	68.7	47.2	21.5	28.5	125	50	27665
Prescor 1/2	4.0	Rp 1/2"	Rp 1/2"	68.7	47.2	21.5	28.5	155	50	27606
Prescor 1/2 M	3.0	R 1/2"	Rp 1/2"	81.2	47.2	19	28.5	125	50	27675
Prescor 1/2 *	2.5	Rp 1/2"	Rp 3/4"	74.7	53.2	26.5	34.5	50	50	27630
Prescor 1/2 *	3.0	Rp 1/2"	Rp 3/4"	74.7	53.2	26.5	34.5	50	50	27634
Prescor 1/2 M x K 15	1.5	R 1/2"	K 15	81.2	60.5	34	42	80	40	28225
Prescor 1/2 M x K 15	2.5	R 1/2"	K 15	81.2	60.5	34	42	105	40	28227
Prescor 1/2 NF	3.0	Rp 1/2"	Rp 1/2"	68.7	47.2	21.5	28.5	125	50	27609
Prescor 1/2 M NF	3.0	R 1/2"	Rp 1/2"	81.2	47.2	19	28.5	125	100	27618
Prescor 3/4	1.5	Rp 3/4"	Rp 3/4"	70.9	49.2	23.5	30.5	115	50	27023
Prescor 3/4	1.8	Rp 3/4"	Rp 3/4"	70.9	49.2	23.5	30.5	125	50	27021
Prescor 3/4	2.5	Rp 3/4"	Rp 3/4"	70.9	49.2	23.5	30.5	150	50	27026
Prescor 3/4	3.0	Rp 3/4"	Rp 3/4"	70.9	49.2	23.5	30.5	165	50	27025
Prescor 3/4	4.0	Rp 3/4"	Rp 3/4"	70.9	49.2	23.5	30.5	200	50	27028
Prescor 3/4 *	3.0	Rp 3/4"	Rp 1"	76.8	55.2	29.5	36.5	100	40	27024
Prescor 3/4 *	2.5	Rp 3/4"	Rp 1"	76.8	55.2	29.5	36.5	100	40	27020
Prescor DN 20- 2,0 bar	2.0	Rp 3/4"	Rp 3/4"	70.9	49.2	23.5	30.5	135	50	28280
Prescor 3/4 M x K 22	1.5	R 3/4"	K 22	85.4	58.6	38	40	105	40	28330
Prescor 3/4 M x K 22	2.0	R 3/4"	K 22	85.4	58.6	38	40	120	40	28331
Prescor 3/4 M x K 22	2.5	R 3/4"	K 22	85.4	58.6	38	40	135	40	28332
Prescor 3/4 M x K 22	3.0	R 3/4"	K 22	85.4	58.6	38	40	150	40	28333
Prescor 3/4 M x K 22	3.5	R 3/4"	K 22	85.4	58.6	38	40	170	40	28334
Prescor 1	1.5	Rp 1"	Rp 1 1/4"	100.5	73.2	36	47	275	16	27042
Prescor 1	2.0	Rp 1"	Rp 1 1/4"	100.5	73.2	36	47	320	16	27043
Prescor 1	3.0	Rp 1"	Rp 1 1/4"	100.5	73.2	36	47	395	16	27045
Prescor 1	3.5	Rp 1"	Rp 1 1/4"	100.5	73.2	36	47	445	16	27047
Prescor 1	4.0	Rp 1"	Rp 1 1/4"	100.5	73.2	36	47	485	16	27040
Prescor 1	5.0	Rp 1"	Rp 1 1/4"	100.5	73.2	36	47	580	16	27049
Prescor 1 *	3.0	Rp 1"	Rp 1 1/4"	100.5	73.2	36	47	200	16	27048
Prescor 1 *	2.5	Rp 1"	Rp 1 1/4"	100.5	73.2	36	47	200	16	27044
Prescor DN 25 - 2,5 bar	2.5	Rp 1"	Rp 1 1/4"	100.5	73.2	36	47	355	16	27034
Prescor 1 1/4	3.0	Rp 1 1/4"	Rp 1 1/2"	108.5	73.5	41	47	580	16	27056
Prescor 1 1/4	4.0	Rp 1 1/4"	Rp 1 1/2"	108.5	73.5	41	47	710	16	27037
Prescor 1 1/4	5.0	Rp 1 1/4"	Rp 1 1/2"	108.5	73.5	41	47	845	16	27039
Prescor 1 1/4 *	2.5	Rp 1 1/4"	Rp 1 1/2"	108.5	73.5	41	47	350	16	27055
Prescor 1 1/4 *	3.0	Rp 1 1/4"	Rp 1 1/2"	108.5	73.5	41	47	350	16	27057

* Manufactured according to TRD directives.

